
File system fun


- File systems: traditionally hardest part of OS
 - More papers on FSes than any other single topic
- Main tasks of file system:
 - Associate bytes with name (files)
 - Associate names with each other (directories)
 - Don't go away (ever)
 - Can implement file systems on disk, over network, in memory, in non-volatile ram (NVRAM), on tape, w/ paper.
 - We'll focus on disk and generalize later
- Today: files, directories, and a bit of performance

Why disks are different

Disk = First state we've seen that doesn't go away



- So: Where all important state ultimately resides
- Slow (milliseconds access vs. nanoseconds for memory)



- Huge (100–1,000x bigger than memory)
 - How to organize large collection of ad hoc information?
 - File System: Hierarchical directories, Metadata, Search

Disk vs. Memory

		MLC NAND	
	Disk	Flash	DRAM
Smallest write	sector	sector	byte
Atomic write	sector	sector	byte/word
Random read	8 ms	3-10 $\mu \mathrm{s}$	50 ns
Random write	8 ms	9-11 μs^*	50 ns
Sequential read	200 MB/s	550-2500 MB/s	> 10 GB/s
Sequential write	200 MB/s	520-1500 MB/s*	> 10 GB/s
Cost	\$0.02/GB	\$0.07-0.20/GB	\$4/GiB
Persistence	Non-volatile	Non-volatile	Volatile

^{*}Flash write performance degrades over time

Disk review

- Disk reads/writes in terms of sectors, not bytes
 - Read/write single sector or adjacent groups



- How to write a single byte? "Read-modify-write"
 - Read in sector containing the byte





- Modify that byte
- Write entire sector back to disk
- Key: if cached, don't need to read in
- Sector = unit of atomicity.



- Sector write done completely, even if crash in middle (disk saves up enough momentum to complete)
- Larger atomic units have to be synthesized by OS


Some useful trends

- Disk bandwidth and cost/bit improving exponentially
 - Similar to CPU speed, memory size, etc.
- Seek time and rotational delay improving very slowly
 - Why? require moving physical object (disk arm)
- Disk accesses a huge system bottleneck & getting worse
 - Bandwidth increase lets system (pre-)fetch large chunks for about the same cost as small chunk.
 - Trade bandwidth for latency if you can get lots of related stuff.
- Desktop memory size increasing faster than typical workloads
 - More and more of workload fits in file cache
 - Disk traffic changes: mostly writes and new data
- Memory and CPU resources increasing
 - Use memory and CPU to make better decisions
 - Complex prefetching to support more IO patterns
 - Delay data placement decisions reduce random IO

Files: named bytes on disk

File abstraction:

- User's view: named sequence of bytes




- FS's view: collection of disk blocks
- File system's job: translate name & offset to disk blocks:



- File operations:
 - Create a file, delete a file
 - Read from file, write to file
- Want: operations to have as few disk accesses as possible & have minimal space overhead (group related things)

What's hard about grouping blocks?

 Like page tables, file system metadata are simply data structures used to construct mappings



- File metadata: map byte offset to disk block address
 512 → Unix inode → 8003121
- Directory: map name to disk address or file #
 foo.c directory 44

FS vs. VM

In both settings, want location transparency

 Application shouldn't care about particular disk blocks or physical memory locations

In some ways, FS has easier job than than VM:

- CPU time to do FS mappings not a big deal (= no TLB)
- Page tables deal with sparse address spaces and random access, files often denser (0 \dots filesize 1), \sim sequentially accessed

In some ways FS's problem is harder:

- Each layer of translation = potential disk access
- Space a huge premium! (But disk is huge?!?!) Reason?
 Cache space never enough; amount of data you can get in one fetch never enough
- Range very extreme: Many files <10 KB, some files many GB

Some working intuitions

FS performance dominated by # of disk accesses

- Say each access costs ~10 milliseconds
- Touch the disk 100 extra times = 1 second
- Can do billions of ALU ops in same time!

Access cost dominated by movement, not transfer:

```
\textbf{seek time} + \textbf{rotational delay} + \texttt{\#bytes/disk-bw}
```

- 1 sector: 5ms + 4ms + 5μ s ($\approx 512 \, \text{B/(}100 \, \text{MB/s)}$) ≈ 9 ms
- 50 sectors: 5ms + 4ms + .25ms = 9.25ms
- Can get 50x the data for only ~3% more overhead!

Observations that might be helpful:

- All blocks in file tend to be used together, sequentially
- All files in a directory tend to be used together
- All names in a directory tend to be used together

Common addressing patterns

Sequential:

- File data processed in sequential order
- By far the most common mode
- Example: editor writes out new file, compiler reads in file, etc

Random access:

- Address any block in file directly without passing through predecessors
- Examples: data set for demand paging, databases

Keyed access

- Search for block with particular values
- Examples: associative data base, index
- Usually not provided by OS

Problem: how to track file's data

Disk management:


- Need to keep track of where file contents are on disk
- Must be able to use this to map byte offset to disk block
- Structure tracking a file's sectors is called an index node or inode
- Inodes must be stored on disk, too

Things to keep in mind while designing file structure:

- Most files are small
- Much of the disk is allocated to large files
- Many of the I/O operations are made to large files
- Want good sequential and good random access (what do these require?)

Straw man: contiguous allocation


- "Extent-based": allocate files like segmented memory
 - When creating a file, make the user pre-specify its length and allocate all space at once
 - Inode contents: location and size



- Example: IBM OS/360
- Pros?
- Cons? (Think of corresponding VM scheme)

Straw man: contiguous allocation


- "Extent-based": allocate files like segmented memory
 - When creating a file, make the user pre-specify its length and allocate all space at once
 - Inode contents: location and size



- Example: IBM OS/360
- Pros?
 - Simple, fast access, both sequential and random
- Cons? (Think of corresponding VM scheme)
 - External fragmentation

Straw man #2: Linked files


- Basically a linked list on disk.
 - Keep a linked list of all free blocks
 - Inode contents: a pointer to file's first block
 - In each block, keep a pointer to the next one



- Examples (sort-of): Alto, TOPS-10, DOS FAT
- Pros?
- Cons?

Straw man #2: Linked files


- Basically a linked list on disk.
 - Keep a linked list of all free blocks
 - Inode contents: a pointer to file's first block
 - In each block, keep a pointer to the next one



- Examples (sort-of): Alto, TOPS-10, DOS FAT
- Pros?
 - Easy dynamic growth & sequential access, no fragmentation
- Cons?
 - Linked lists on disk a bad idea because of access times
 - Random very slow (e.g., traverse whole file to find last block)
 - Pointers take up room in block, skewing alignment

Example: DOS FS (simplified)

• Linked files with key optimization: puts links in fixed-size "file allocation table" (FAT) rather than in the blocks.

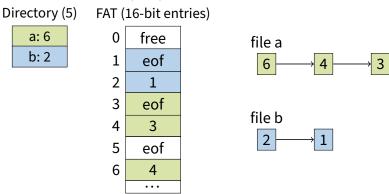

 Still do pointer chasing, but can cache entire FAT so can be cheap compared to disk access

FAT discussion

- Entry size = 16 bits
 - What's the maximum size of the FAT?
 - Given a 512 byte block, what's the maximum size of FS?
 - One solution: go to bigger blocks. Pros? Cons?
- Space overhead of FAT is trivial:
 - 2 bytes / 512 byte block = \sim 0.4% (Compare to Unix)
- Reliability: how to protect against errors?
 - Create duplicate copies of FAT on disk
 - State duplication a very common theme in reliability
- Bootstrapping: where is root directory?
 - Fixed location on disk:

FAT	(opt) FAT	root dir	
-----	-----------	----------	--


FAT discussion

- Entry size = 16 bits
 - What's the maximum size of the FAT? 65,536 entries
 - Given a 512 byte block, what's the maximum size of FS? 32 MiB
 - One solution: go to bigger blocks. Pros? Cons?
- Space overhead of FAT is trivial:
 - 2 bytes / 512 byte block = \sim 0.4% (Compare to Unix)
- Reliability: how to protect against errors?
 - Create duplicate copies of FAT on disk
 - State duplication a very common theme in reliability
- Bootstrapping: where is root directory?
 - Fixed location on disk:

FAT	(opt) FAT	root dir	
	· ·	l	l

Another approach: Indexed files

- Each file has an array holding all of its block pointers
 - Just like a page table, so will have similar issues
 - Max file size fixed by array's size (static or dynamic?)
 - Allocate array to hold file's block pointers on file creation
 - Allocate actual blocks on demand using free list




Cons?

Another approach: Indexed files

Each file has an array holding all of its block pointers

- Just like a page table, so will have similar issues
- Max file size fixed by array's size (static or dynamic?)
- Allocate array to hold file's block pointers on file creation
- Allocate actual blocks on demand using free list




- Both sequential and random access easy

Cons?

Mapping table requires large chunk of contiguous space
 ... Same problem we were trying to solve initially

Indexed files

Issues same as in page tables




- Large possible file size = lots of unused entries
- Large actual size? table needs large contiguous disk chunk
- Solve identically: small regions with index array, this array with another array, ... Downside?



Multi-level indexed files (old BSD FS)

- Solve problem of first block access slow
- inode = 14 block pointers + "stuff"

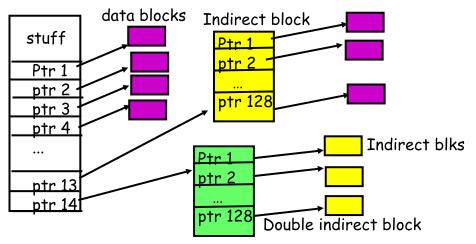

Old BSD FS discussion

Pros:

- Simple, easy to build, fast access to small files
- Maximum file length fixed, but large.

Cons:

- What is the worst case # of accesses?
- What is the worst-case space overhead? (e.g., 13 block file)

An empirical problem:

- Because you allocate blocks by taking them off unordered freelist, metadata and data get strewn across disk


More about inodes

Inodes are stored in a fixed-size array

- Size of array fixed when disk is initialized; can't be changed
- Lives in known location, originally at one side of disk:



- Now is smeared across it (why?)



- The index of an inode in the inode array called an i-number
- Internally, the OS refers to files by inumber
- When file is opened, inode brought in memory
- Written back when modified and file closed or time elapses

Directories

- Problem:
 - "Spend all day generating data, come back the next morning, want to use it." – F. Corbató, on why files/dirs invented
- Approach 0: Users remember where on disk their files are
 - E.g., like remembering your social security or bank account #
- Yuck. People want human digestible names
 - We use directories to map names to file blocks
- Next: What is in a directory and why?

A short history of directories

Approach 1: Single directory for entire system

- Put directory at known location on disk
- Directory contains (name, inumber) pairs
- If one user uses a name, no one else can
- Many ancient personal computers work this way


Approach 2: Single directory for each user

- Still clumsy, and 1s on 10,000 files is a real pain
- Approach 3: Hierarchical name spaces
 - Allow directory to map names to files *or other dirs*
 - File system forms a tree (or graph, if links allowed)
 - Large name spaces tend to be hierarchical (ip addresses, domain names, scoping in programming languages, etc.)

Hierarchical Unix

- Used since CTSS (1960s)
 - Unix picked up and used really nicely
- afs bin cdrom dev sbin tmp


 awk chmod chown
- Directories stored on disk just like regular files
 - Special inode type byte set to directory
 - Users can read just like any other file (historically)
 - Only special syscalls can write (why?)
 - Inodes at fixed disk location
 - File pointed to by the index may be another directory
 - Makes FS into hierarchical tree (what needed to make a DAG?)
- Simple, plus speeding up file ops speeds up dir ops!



Naming magic

- Bootstrapping: Where do you start looking?
 - Root directory always inode #2 (0 and 1 historically reserved)
- Special names:
 - Root directory: "/" (fixed by kernel-e.g., inode 2)
 - Current directory: "." (actual directory entry on disk)
 - Parent directory: ".." (actual directory entry on disk)
- Some special names are provided by shell, not FS:
 - User's home directory: "∼"
 - Globbing: "foo.*" expands to all files starting "foo."
- Using the given names, only need two operations to navigate the entire name space:
 - cd name: move into (change context to) directory name
 - 1s: enumerate all names in current directory (context)

Unix example: /a/b/c.c

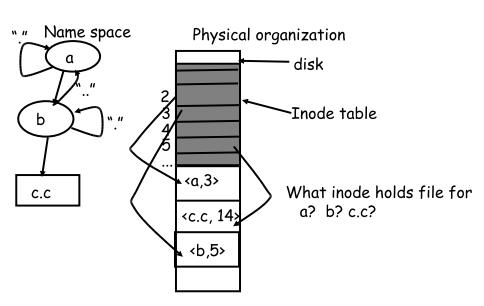

Default context: working directory

Cumbersome to constantly specify full path names

- In Unix, each process has a "current working directory" (cwd)
- File names not beginning with "/" are assumed to be relative to cwd; otherwise translation happens as before
- Editorial: root, cwd should be regular fds (like stdin, stdout, ...)
 with openat syscall instead of open

Shells track a default list of active contexts


- A "search path" for programs you run
- Given a search path A : B : C, a shell will check in A, then check in B, then check in C
- Can escape using explicit paths: "./foo"

Example of locality

Hard and soft links (synonyms)

More than one dir entry can refer to a given file

- Unix stores count of pointers ("hard links") to inode
- To make: "In foo bar" creates a synonym (bar) for file foo




Soft/symbolic links = synonyms for names

- Point to a file (or dir) *name*, but object can be deleted from underneath it (or never even exist).
- Unix implements like directories: inode has special "symlink" bit set and contains name of link target

- When the file system encounters a symbolic link it automatically translates it (if possible).

Case study: speeding up FS

Original Unix FS: Simple and elegant:



Components:

- Data blocks
- Inodes (directories represented as files)
- Hard links
- Superblock. (specifies number of blks in FS, counts of max # of files, pointer to head of free list)

Problem: slow

 Only gets 20Kb/sec (2% of disk maximum) even for sequential disk transfers!

A plethora of performance costs

- Blocks too small (512 bytes)
 - File index too large
 - Too many layers of mapping indirection
 - Transfer rate low (get one block at time)
- Poor clustering of related objects:
 - Consecutive file blocks not close together
 - Inodes far from data blocks
 - Inodes for files in same directory not close together
 - Poor enumeration performance: e.g., "ls -l", "grep foo *.c"
- Usability problems
 - 14-character file names a pain
 - Can't atomically update file in crash-proof way
- Next: how FFS fixes these (to a degree) [McKusic]

Problem: Internal fragmentation

- Block size was too small in Unix FS
- Why not just make block size bigger?


Block size	space wasted	file bandwidth
512	6.9%	2.6%
1024	11.8%	3.3%
2048	22.4%	6.4%
4096	45.6%	12.0%
1MB	99.0%	97.2%

- Bigger block increases bandwidth, but how to deal with wastage ("internal fragmentation")?
 - Use idea from malloc: split unused portion.

Solution: fragments

BSD FFS:


- Has large block size (4096 or 8192)
- Allow large blocks to be chopped into small ones ("fragments")
- Used for little files and pieces at the ends of files



- Best way to eliminate internal fragmentation?
 - Variable sized splits of course
 - Why does FFS use fixed-sized fragments (1024, 2048)?

Clustering related objects in FFS


• Group sets of consecutive cylinders into "cylinder groups"

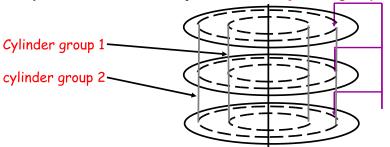


- Key: can access any block in a cylinder without performing a seek. Next fastest place is adjacent cylinder.
- Tries to put everything related in same cylinder group
- Tries to put everything not related in different group

Clustering in FFS

- Tries to put sequential blocks in adjacent sectors
 - (Access one block, probably access next)




- Tries to keep inode in same cylinder group as file data:
 - (If you look at inode, most likely will look at data too)



- Tries to keep all inodes in a dir in same cylinder group
 - Access one name, frequently access many, e.g., "1s -1"

What does disk layout look like?

Each cylinder group basically a mini-Unix file system:

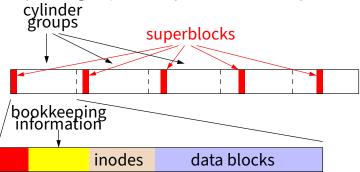

- How how to ensure there's space for related stuff?
 - Place different directories in different cylinder groups
 - Keep a "free space reserve" so can allocate near existing things
 - When file grows too big (1MB) send its remainder to different cylinder group.

Finding space for related objs

Old Unix (& DOS): Linked list of free blocks

Just take a block off of the head. Easy.



 Bad: free list gets jumbled over time. Finding adjacent blocks hard and slow

FFS: switch to bit-map of free blocks

- 101010111111110000011111111000101100
- Easier to find contiguous blocks.
- Small, so usually keep entire thing in memory
- Time to find free block increases if fewer free blocks

Using a bitmap

- Usually keep entire bitmap in memory:
 - 4G disk / 4K byte blocks. How big is map?
- Allocate block close to block x?
 - Check for blocks near bmap [x/32]
 - If disk almost empty, will likely find one near
 - As disk becomes full, search becomes more expensive and less effective
- Trade space for time (search time, file access time)
- Keep a reserve (e.g, 10%) of disk always free, ideally scattered across disk
 - Don't tell users (df can get to 110% full)
 - Only root can allocate blocks once FS 100% full
 - With 10% free, can almost always find one of them free

So what did we gain?

Performance improvements:

- Able to get 20-40% of disk bandwidth for large files
- 10-20x original Unix file system!
- Better small file performance (why?)
- Is this the best we can do? No.
- Block based rather than extent based
 - Could have named contiguous blocks with single pointer and length (Linux ext[2-4]fs, XFS)
- Writes of metadata done synchronously
 - Really hurts small file performance
 - Make asynchronous with write-ordering ("soft updates") or logging/journaling... more next lecture
 - Play with semantics (/tmp file systems)

Other hacks

- Obvious:
 - Big file cache
- Fact: no rotation delay if get whole track.
 - How to use?
- Fact: transfer cost negligible.
 - Recall: Can get 50x the data for only \sim 3% more overhead
 - 1 sector: 5ms + 4ms + 5μ s ($\approx 512 \,\mathrm{B/(100 \,MB/s)}$) \approx 9ms
 - 50 sectors: 5ms + 4ms + .25ms = 9.25ms
 - How to use?
- Fact: if transfer huge, seek + rotation negligible
 - LFS: Hoard data, write out MB at a time
- Next lecture:
 - FFS in more detail
 - More advanced, modern file systems